




(NO. OF POSITIONS PER ROW)*2.54±0.5±0.30

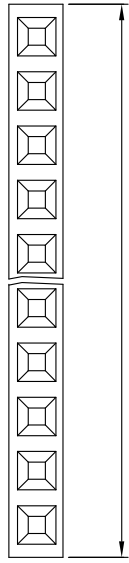

SPECIFICATIONS
 CURRENT RATING: 3 AMP MAX
 INSULATION RESISTANCE: 1000MΩ MIN. AT 1000V DC
 CONTACT RESISTANCE: 30mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC RMS FOR 60 SECONDS
 OPERATING TEMPERATURE: -55°C TO +105°C
 MATERIAL AND FINISH
 HOUSING: PBT(UL94V-0), BLACK
 TERMINAL: COPPER ALLOY (t=0.40mm), GOLD PLATING

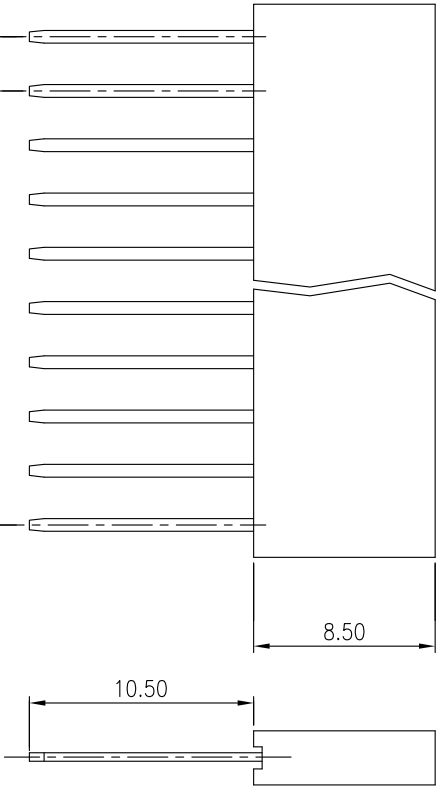

ORDER INFORMATION:
 PRd850-PXX01Gf-1050
 PR: RECEPTACLE
 G: 2.54mmX2.54mm PITCH
 850: SERIES NO.
 P: PCB TYPE, STRAIGHT TYPE
 XX: NO. OF PINS PER ROW
 01: SINGLE ROW
 Gf: CONTACT PLATING, GOLD FLASH
 1050: SOLDER HEIGHT 10.50mm

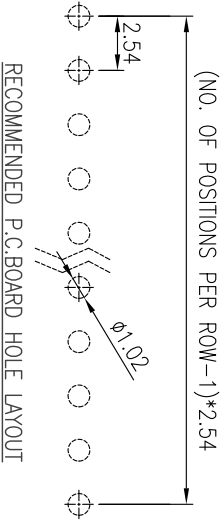

		REVISIONS				
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE
△				△		
△				△		

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**

TOLERANCES UNLESS OTHERWISE SPECIFIED		SIGNATURES		DATE		MODEL	
SYMBOL	UNIT	SCALE				TITLE	
△	mm	3/1	CHECKED	AARON	20/NOV/13'	RECEPTACLE	
			APPROVALS				NO. PRd850-P__01Gf-1050